

Chemical Resistant Inductive Proximity Sensor

E2FQ

Teflon housing for increased chemical and detergent resistance*



Note:1.

* Teflon is a registered trademark of Dupont Company and Mitsui Dupont Chemical Company for their fluoride resin.

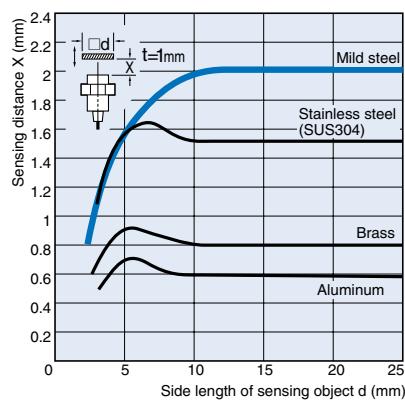
Ordering Information

Shape		Sensing distance	DC 3-wire models			DC 2-wire models		AC 2-wire models			
			PNP (NO)	NPN (NO)	Response frequency	NO	Response frequency	NO	Response frequency		
Shielded	M12	2mm			E2FQ-X2F1	E2FQ-X2E1	1.5 kHz	E2FQ-X2D1	800 Hz	---	---
	M18	5mm			E2FQ-X5F1	E2FQ-X5E1	600 Hz	E2FQ-X5D1	500 Hz	E2FQ-X5Y1	25 Hz
	M30	10mm			E2FQ-X10F1	E2FQ-X10E1	400 Hz	E2FQ-X10D1	300 Hz	E2FQX10Y1	

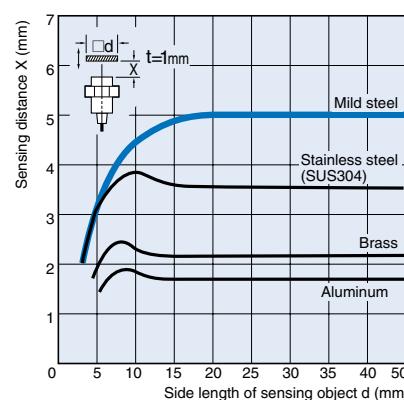
Characteristic data (typical)

Sensing Distance vs. Sensing Object

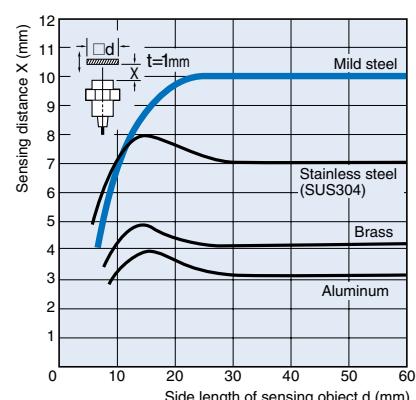
E2FQ-X2□



E2FQ-X5□



E2FQ-X10□



Note: 1 . CE mark certification in progress at time of catalog printing. Please contact your OMRON representative for the current status.

Rating/Performance

Item	Model	E2FQ-X2□	E2FQ-X5□	E2FQ-X10□
Sensing distance		2 mm ±10%	5 mm ±10%	10 mm ±10%
Setting distance		0 to 1.6 mm	0 to 4 mm	0 to 8 mm
Differential distance		E1, F1, Y1 models: 10% max. of sensing distance		
Sensing object		Ferrous metal (Sensitivity lowers with non-ferrous metals)		
Standard sensing object (mild steel)		12 x 12 x 1 mm	18 x 18 x 1 mm	30 x 30 x 1 mm
Response frequency*1		E1, F1 models: 1.5 kHz D1 models: 800 Hz	E1, F1 models: 600 Hz, D1 models: 500 Hz	E1, F1 models: 400 Hz, D1 models: 300 Hz
			Y1 models: 25 Hz	
Power supply (Operating voltage range)		E1, F1 models: 12 to 24 VDC, ripple (p-p) : 10% max., (10 to 30 VDC) D1 models: 12 to 24 VDC, ripple (p-p) : 20% max., (10 to 36 VDC)		
Current consumption		E1, F1 models: 17 mA max.		
Leakage current		D1 models: 0.8 mA max., Y models: 5 to 300 mA		
Control output	Switching capacity	E1, F1 models: 200 mA max., D1 models: 5 to 100 mA DC, Y models: 5 to 300 mA		
	Residual voltage	E1, F1 models: 2 V max. (load current: 200 mA with cable length: 2 m) Y models: Refer to the Specifications. D1 models: 4.0 V max. (under load current of 100 mA with cable length of 2 m)		
Indicator lamp		E,D models: detection indicator (red), Y models: operation indicator (red)		
Operating status (with sensing object approaching)		E1, F1 models, D1 models and Y1 models: NO		
Protective circuits		E1, F1 models: Protection for reverse polarity, load short circuit, surge voltage		
Ambient temperature		Operating/Storage: -25°C to 70°C (with no icing or condensation)		
Ambient humidity		Operating/Storage: 35% to 95%RH (with no condensation)		
Temperature influence		10% max. of sensing distance at 23°C within temperature range of -25°C to 70°C		
Voltage influence		E1, F1 models: ±2.5% max. of sensing distance within rated voltage range ±15%		
Insulation resistance		50 MΩ min. (at 500 VDC) between energized parts and case		
Dielectric strength		E1, F1, D1 models: 1,000 VAC 50/60 Hz for 1 min between energized parts and case		
Vibration resistance		Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions		
Shock resistance		Destruction: 500 m/s² for 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s² for 10 times each in X, Y, and Z directions	
Protective structure		IEC60529 IP67		
Connection method		Pre-wired models (standard length: 2 m)		
Weight (Packed state)		Approx. 70 g	Approx. 130 g	Approx. 170 g
Material	Case			
	Sensing surface	Teflon *2		
Accessories		Instruction manual		

*1. The response frequencies for DC switching are average values measured on condition that the distance between each sensing object is twice as large as the size of the sensing object and the sensing distance set is half of the maximum sensing distance.

*2. Teflon is a registered trademark of Dupont Company and Mitsui Dupont Chemical Company for their fluoride resin.

Output Circuit Diagram

Operating status	Output specifications	Model	Timing chart	Output circuit
NO	PNP	E2FQ-X□F1	<p>Sensing object Yes No</p> <p>Load (between black and blue leads) Operates Releases</p> <p>Output voltage (between black and blue leads) H L</p> <p>Operation indicator ON OFF</p>	
	NPN	E2FQ-X□E1	<p>Sensing object Yes No</p> <p>Load (between black and blue leads) Operates Releases</p> <p>Output voltage (between black and blue leads) H L</p> <p>Operation indicator ON OFF</p>	<p>Note: 1. 200 mA max.(load current) 2. When a transistor is connected</p>
	DC 2-wire	E2FQ-X□D1	<p>Sensing object Yes No</p> <p>Load Operates Releases</p> <p>Operation indicator ON OFF</p>	<p>Note: The load can be connected to either the +V or the 0-V line.</p>
	AC 2-wire Models	E2FQ-X□Y1	<p>Sensing object Yes No</p> <p>Load Operates Releases</p> <p>Operation indicator ON OFF</p>	

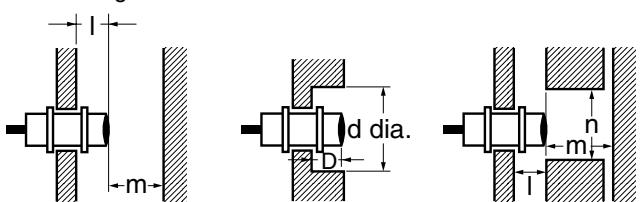
Precautions

Correct Use

Design

Effects of Surrounding Metal

Provide a minimum distance between the Sensor and the surrounding metal as shown in the table below.



Effects of Surrounding Metal

(Unit: mm)

Model	Item	I	d	D	m	n
E2FQ-X2□	0	12	0	8	12	18
					18	27
					30	45


Mutual Interference

If more than one Proximity Sensor is installed face to face or in parallel, ensure that the distances between two Units adjacent to each other are the same as or larger than the corre-

sponding values shown in the following table.

Mutual Interference (Unit: mm)

Model	Item	A	B
E2FQ-X2□		30	20
E2FQ-X5□		50	35
E2FQ-X10□		100	70



Installation

Do not tighten the nut with excessive force. A washer must be used with the nut.



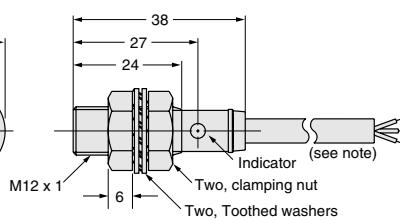

Note: The table below shows the value of tightening torques when using toothed washers.

Model	Torque	Tensile strength (torque)
E2FQ-X2□		0.98 Nm
E2FQ-X5□		2 Nm
E2FQ-X10□		

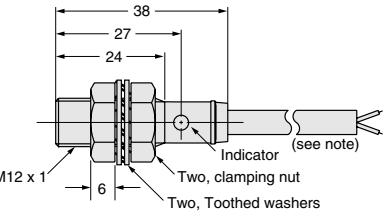

Others

Chemical resistance

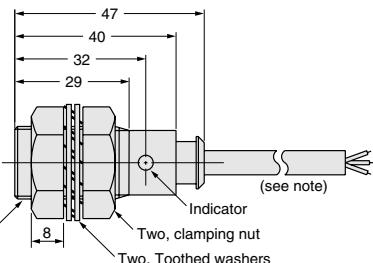

Dimensions (Unit: mm)

E2FQ-X2E1**E2FQ-X2F1**

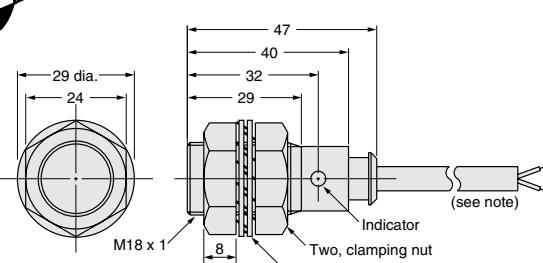

Note:
Oil-resistant, vibration-resistant, and fire-retardant
vinyl-insulated round cord, 6 dia. x 3 cores,
standard length: 2 m
The cord can be extended in an independent conduit
for 200 m maximum.

E2FQ-X2D1

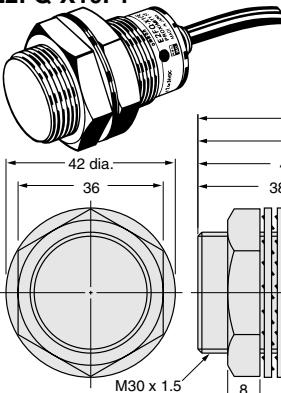
Note:
Oil-resistant, vibration-resistant, and fire-retardant
vinyl-insulated round cord, 6 dia. x 2 cores,
standard length: 2 m
The cord can be extended in an independent conduit
for 200 m maximum.

E2FQ-X5E1**E2FQ-X5F1**

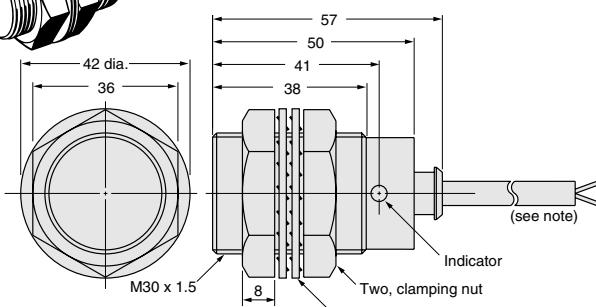

Note:
Oil-resistant, vibration-resistant, and fire-retardant
vinyl-insulated round cord, 6 dia. x 3 cores,
standard length: 2 m
The cord can be extended in an independent conduit
for 200 m maximum.

E2FQ-X5D1**E2FQ-X5Y1**

Note:
Oil-resistant, vibration-resistant, and fire-retardant
vinyl-insulated round cord, 6 dia. x 2 cores,
standard length: 2 m
The cord can be extended in an independent conduit
for 200 m maximum.


E2FQ-X10E1**E2FQ-X10F1**

Note:
Oil-resistant, vibration-resistant, and fire-retardant vinyl-insulated
round cord, 6 dia. x 3 cores, standard length: 2 m
The cord can be extended in an independent conduit for 200 m maximum.

E2FQ-X10D1**E2FQ-X10Y1**

Note:
Oil-resistant, vibration-resistant, and fire-retardant vinyl-insulated
round cord, 6 dia. x 2 cores, standard length: 2 m
The cord can be extended in an independent conduit for 200 m maximum.

Mounting Holes



Model	F (mm)
E2FQ-X2□	12.5 mm dia. ^{+0.5} ₀
E2FQ-X5□	18.5 mm dia. ^{+0.5} ₀
E2FQ-X10□	30.5 mm dia. ^{+0.5} ₀

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.